

StyleLite<sup>®</sup>  
by **EGR**

SUPERIOR HIGH  
GLOSS PANELS



**EGR**








[stylelite-aca.com](http://stylelite-aca.com)


# COLOUR RANGE

Due to the nature of the printing process, the colours and images depicted throughout this brochure may vary compared to the actual finished products' colour. Images and colours are to be used as a guide only. Actual colour samples can be obtained from your StyleLite distributor.


\* Denotes Metallic.

# Also available in Velvet (low gloss) finish.

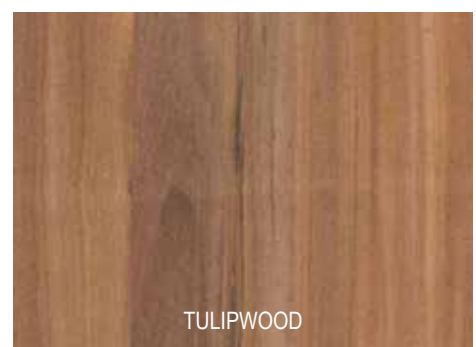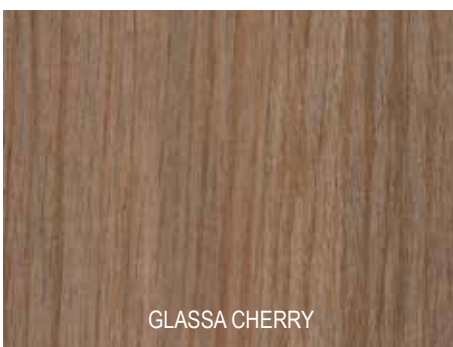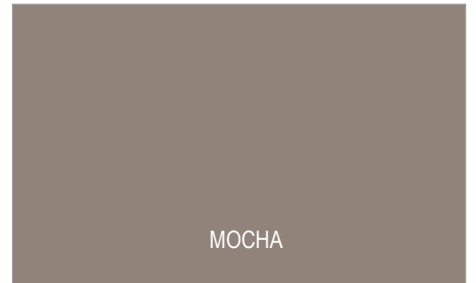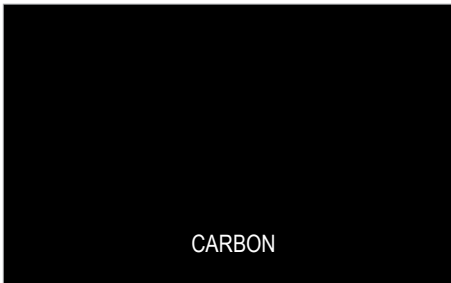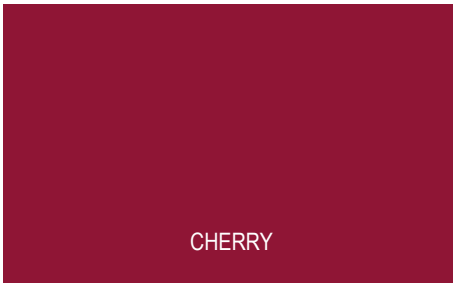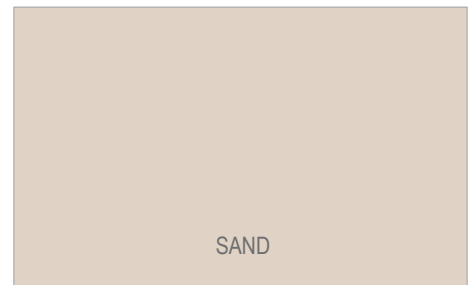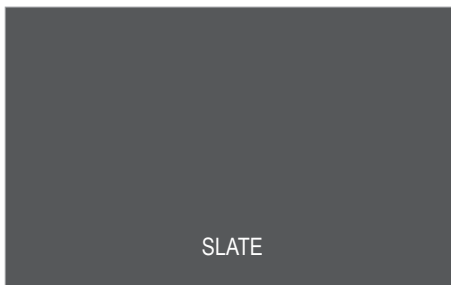


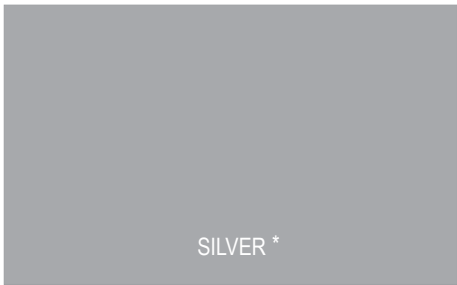

SILVER \*

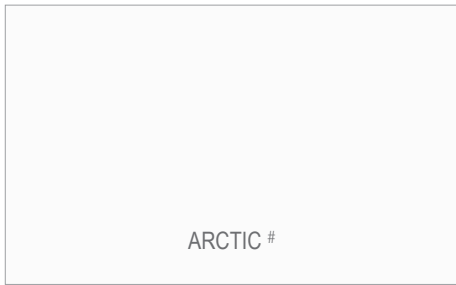


ARCTIC #

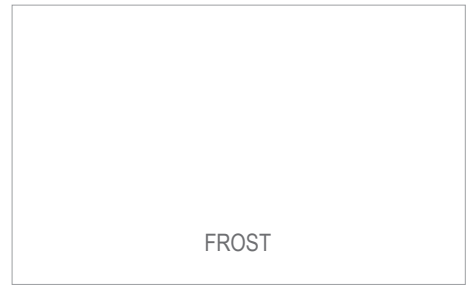

FROST




ESPRESSO

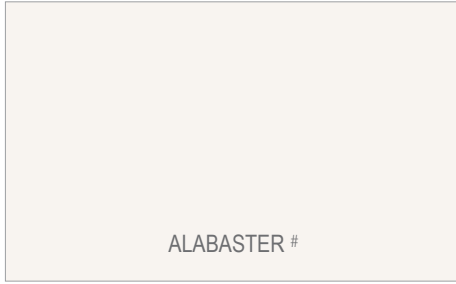

ALABASTER #




ASH

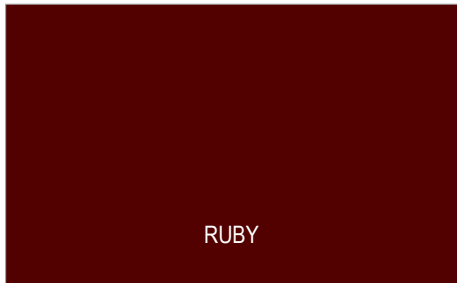


RUBY



FOSSIL

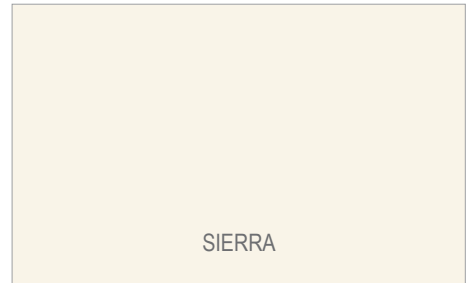


SIERRA

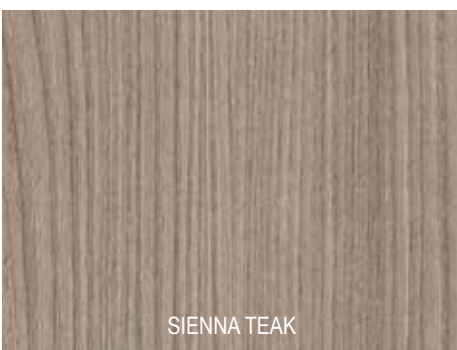

SIENNA TEAK



TIERRA ELM

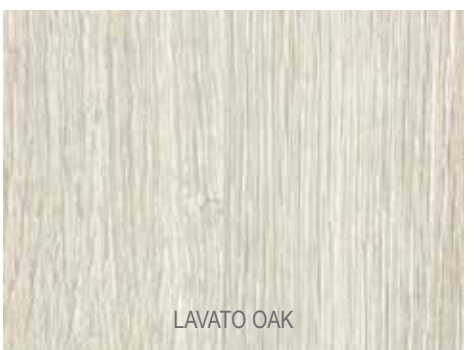

LAVATO OAK

StyleLite is the Australian made premium high gloss acrylic finished board for doors, drawer fronts and joinery.

StyleLite provides a superior appearance compared with laminates, 2 pack or vinyl - making it the preferred choice for discerning home owners, interior designers and architects.

StyleLite is laminated using world class, PUR (polyurethane) hot melt bonding system which delivers unsurpassed adhesion and a premium ripple free finish that is highly resistant to heat, moisture and environmental change over time.

## SUPERIOR FEATURES

- Ultra high gloss ripple free surface
- UV and colour change protected
- Good scratch resistance
- Won't chip, crack or delaminate
- Very easy to clean and maintain
- Economical and easy to fabricate

## APPLICATIONS

- Kitchen Cabinets & Doors
- Office Furniture & Partitions
- Wardrobe and Passageway Doors
- Wall Cladding in Retail Outlets
- Caravans & RV joinery
- Marine joinery



## CLEANING

Best results are achieved by using a soft cloth or chamois with a non abrasive soap or detergent in warm water.

## POLISHING

Minor scratches and scuffs can be easily removed from StyleLite by hand with selected liquid polishes and soft polishing cloths. Cleaning and refinishing kits available from your StyleLite distributor.

## ENVIRONMENT

StyleLite is fully recyclable by mechanical means.

StyleLite sheet is manufactured and then laminated without the use of any VOC's or other harmful emissions.

StyleLite is hygienic and does not promote bacterial growth or transmission.

## STANDARD BOARD OPTIONS

Applications	Substrate	Finish	Finished panel thickness
Kitchens, Bathroom, Joinery	2400 x 1200 x 16mm MR MDF E0*	StyleLite High Gloss both sides	18mm
	2400 x 1200 x 16mm MR MDF E0*	StyleLite Gloss Face and textured white back	18mm
	3000# x 1200 x 16mm MR MDF E0*	StyleLite High Gloss both sides	18mm
Wardrobe	2400 x 1200 x 7.5mm MDF	StyleLite Gloss Face and textured white back	9.5mm
	2700 x 1200 x 7.5mm MDF	StyleLite Gloss Face and textured white back	9.5mm
Caravans & RV	2400 x 1200 x 15mm lightweight plywood	StyleLite High Gloss both sides	17mm

\* E0 MR MDF board is a low formaldehyde emitting MDF product that has a formaldehyde emission of less than 0.5mg/L, which is lower than the current Australian standard.

# 3000mm long board is made to order. Limited colour offer.

## EDGE TAPE

A near seamless appearance can be achieved using StyleLite high gloss ABS colour matched edge tape.

Many other contrast and dual colour tapes can be used to achieve a sophisticated and contemporary style.

## METALLIC COLOURS

Metallic colours are directional. Take note of the arrows on the protective sheet. We recommend all metallic panels are positioned with the arrows in one direction to avoid apparent shade or colour variation.

## STYLELITE PROPERTIES & PERFORMANCE

Properties	Specification	Method
Gloss Level	> 90%	Viewed at 60°
Mass - MDF Substrate	13.5kg/m <sup>2</sup>	18mm thick
	8.0kg/m <sup>2</sup>	9.5mm thick
	8.0kg/m <sup>2</sup>	17mm thick
Surface Hardness	3H	Pencil Hardness
Heat Distortion Temperature	85°C	ASTM D648
Service Temperature	70°C	Continuous
Fire Rating	Group 4	A2.4 BCA
Bond Strength	100N (25N min)	AS/NZS 4266.28
Surface Resistance	1.25 MPa (0.9 MPa min)	AS/NZS 4266.7
Stain Resistance	No effect	AS/NZS 4266.25
Steam Resistance	No change after 30 min	AS/NZS 4266.23
Cracking Resistance	No effect	AS/NZS 4266.24
Dry Heat Resistance	No loss of gloss or colour change	AS/NZS 4266.26

## STANDARDS

StyleLite laminated board complies with AS/NZS 4386.1 Domestic Kitchen Assemblies for Appearance, Flatness, Substrate and Adhesive Bonding System.



# StyleLite®

by **EGR**

DISTRIBUTED BY:



**AUSTRALIA**  
EGR HEAD OFFICE  
Tel: +61 7 3718 1100  
Fax: +61 7 3217 0295  
Email: [info@stylelite-aca.com](mailto:info@stylelite-aca.com)

To view the StyleLite website scan the QR code with your smart device

1. EGR expressly disclaims any representations or warranties of any kind, whether express or implied, as to the accuracy, currency, completeness and/or the merchantability or fitness for a particular purpose of any information contained in or provided via this documentation and/or any service or product described or promoted in this document. 2. It is the customer's responsibility to thoroughly examine StyleLite by a qualified person, to determine whether it is suitable for the application it was purchased for. 3. The receiver of our products is fully responsible to check and to take into account possible third party's patent rights, as well as the existing laws in the country of installation prior to installing our product. 4. No liability may be derived from these images or statements nor from our free technical advice. 5. EGR reserves the right to change, add or remove colors or product without notice. 6. StyleLite is for indoor use only. 7. StyleLite and EGR are registered trademarks. 8. Images and colours should be used as a guide only.

© Copyright 2014 / Patent Pending

Oakmoore Pty Ltd trading as EGR. ABN: 13 056 159 570

*StyleLite is the Australian owned and made high gloss board that delivers superior style using a contemporary colour palette*

